
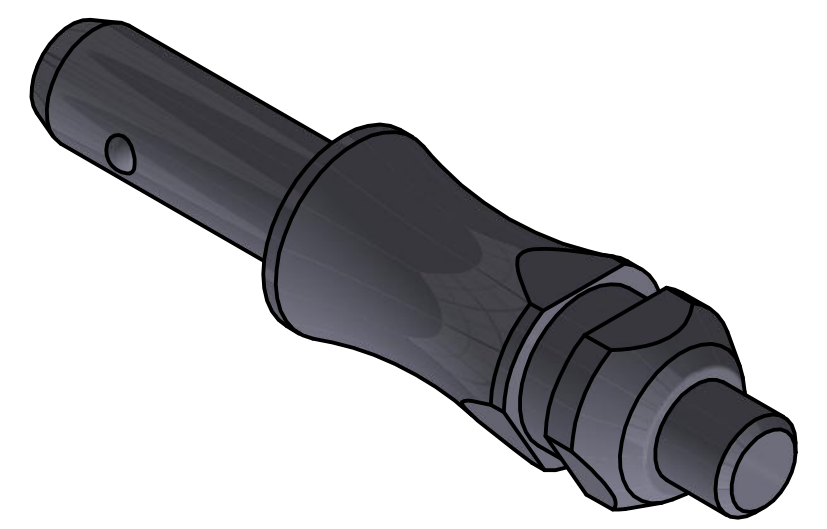


Artikel-Nr. STOxxparts	Abmessungen						Aufnahmebohrung H11 [mm]	Scherfestigkeit zweischnittig min. [kN]	Tempbereich max. [°C]	Gewicht [g]
	d ₁ -0,04 -0,08	l ₁ +0,6	d ₂	d ₃	l ₂ ±1	l ₃				
	[mm]									
05000319001	6	10	7,0	10	7,0	26,2	6	23	400	7
05000319002	6	20	7,0	10	7,0	26,2	6	23	400	8
05000319003	6	30	7,0	10	7,0	26,2	6	23	400	9
05000319004	6	40	7,0	10	7,0	26,2	6	23	400	10
05000319005	6	50	7,0	10	7,0	26,2	6	23	400	11
05000319006	8	20	9,5	14	8,2	33,1	8	43	400	19
05000319007	8	30	9,5	14	8,2	33,1	8	43	400	21
05000319008	8	40	9,5	14	8,2	33,1	8	43	400	23
05000319009	8	50	9,5	14	8,2	33,1	8	43	400	25
05000319010	10	20	12,0	14	9,6	33,1	10	43	400	23
05000319011	10	30	12,0	14	9,6	26,2	10	69	400	26
05000319012	10	40	12,0	14	9,6	26,2	10	69	400	29
05000319013	10	50	12,0	14	9,6	26,2	10	69	400	32
05000319014	10	60	12,0	14	9,6	26,2	10	69	400	36

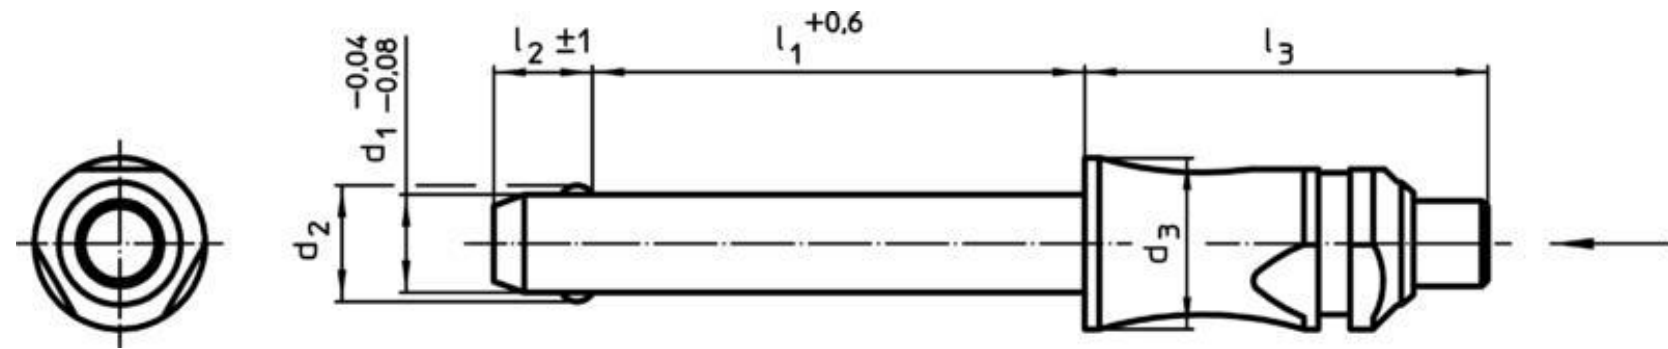

STOxx parts				tolerance DIN2768-mk	
...der Normteiler					
	Datum	Name		Kugelsperrbolzen, selbstsichernd, mit Standardgriff, Titan	
Gezeichnet	17.05.2020	Philipp Joos			
Kontroll					
Norm					
				05000319000	
				1	
				A3	
				weight N/A	
				scale 1:1	

Erstfreigabe	18.05.2020		PJ
Rev.	Änderungstext	Änderungsdatum	Änderungsstamm
			Gen.