

Highlights:

- 19" Power distribution unit
- Male Schuko (CEE 7/7) input connection
- Black aluminum housing
- Chassis earth connection point
- 16A ~ 250 VAC / 4000 W Max
- 2.5 meter fixed connection cable
- Dimmable rack lighting (LED) with ON/OFF switch
- Charging front USB front connection (2x)
- 3 x 2.5 mm² cable diameter



Product information:

The PSR529 series includes a switchable LED rack light, two front USB jacks and a 16 Amps circuit breaker on the front panel of the unit. Power surge & spike protection is offered by the internal protector network, while a voltage and current indicator allow continuous voltage and power consumption monitoring. Power distribution for up to nine devices is made possible using the rear output sockets.

Product Features:


Dimensions	483 x 44.7 mm (W x H) (with mounting ears)
Cable length	2.5 m
Unit height	1 HE
Weight	1.92 kg
Power handling	250 V AC ~ 16 A / 4000 W
Surge protection	Maximum continuous working voltage (Ur): < 1000V
	Nominal discharge current (8/20μS) In: 10 KA
	Voltage protection level (Up): < 1000 V
	Response time (tA): < 25 nS
USB	Insulation resistance (Ris): > 100 MΩ
	2 x USB Type A connections
	5V / 2.1 A supply (two ports combined)
LED Light	Switchable ON/OFF (switch)
	Dimmable between 25% and 100%
	Max. 70 lumen

Physical Characteristics:

Inner conductor	Section	3 x 2.5 mm ²
-----------------	---------	-------------------------

Variants:

- PSR529G/B - Black version

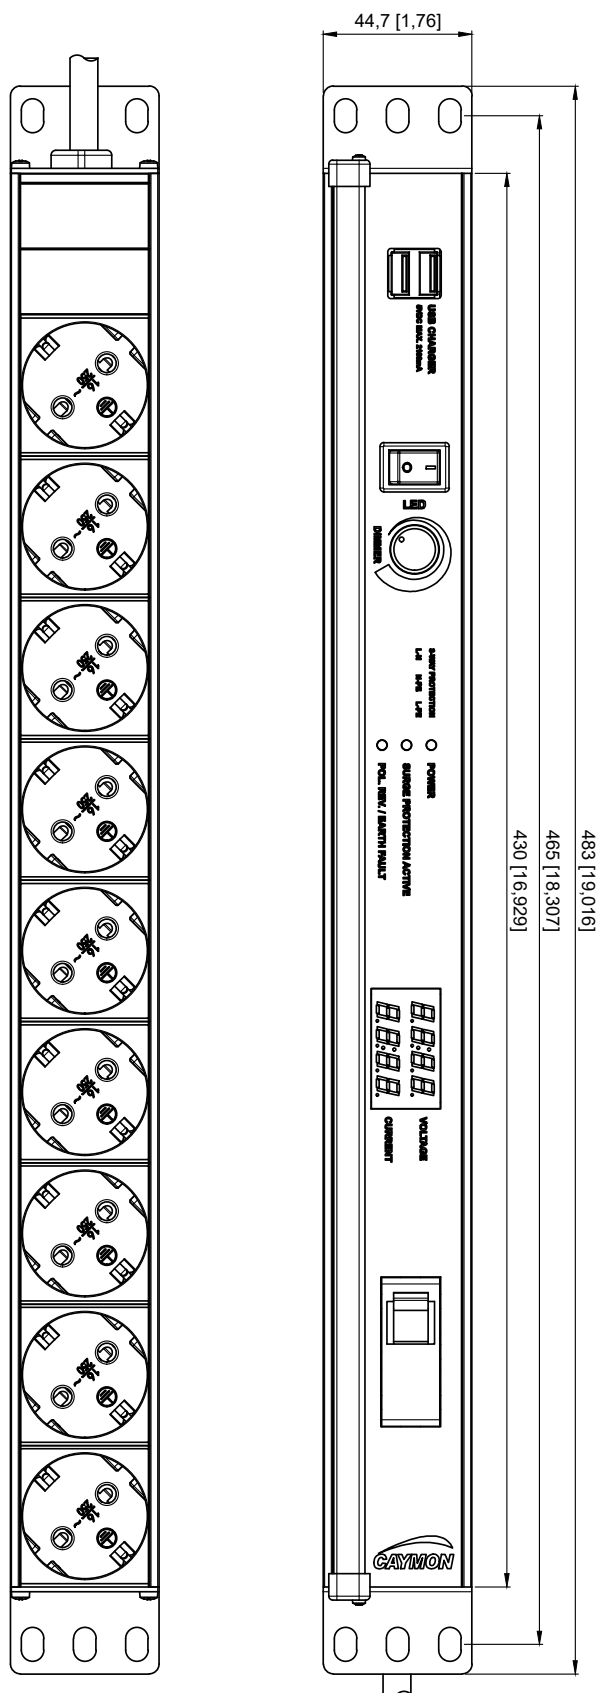

	
PSR529G	
Product description	19" POWER DISTR - 9 x GERMAN - LIGHT/USB/FUSE/SURGE/DISPLAY
MM	Weight
[INCH]	1,92 kg 4,23 lbs
Outer dimensions	(w x h x d) 483 x 44,7 x 157,7 mm 19,016 x 1,76 x 6,209 "
Unit height	1 HE