


Highlights:

- Triple shielding

Product information:


100 meter reel of 26 AWG-size High quality HDMI cable. If, installed correctly this cable can reach high speeds that live up to the highest HDMI standards. This cable is designed for installation using the PROCAB Contractor Series equipment. Lengths below 8m will perform as HIGH SPEED HDMI with ETHERNET Lengths from 8m until 12m will perform at STANDARD SPEED HDMI with ETHERNET standards. Recommended HD distance : 20 m

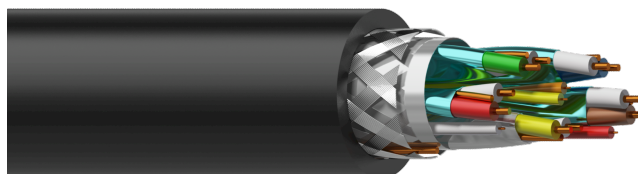

Certification:



Properties:



Inner Conductors:



STRANDED TINNED
COPPER



SOLID OXYGEN FREE
COPPER

Shielding:



ALUMINUM
FOIL



BARE COPPER
DRAIN WIRE

Usage:

MOBILE

INSTALL

Physical Characteristics:

Inner conductor	Insulation	Material	FM-PE 1.1 mm (Ø) (5 pair)
			HD-PE 0.9 mm (Ø) (1 pair)
			HD-PE 0.9 mm (Ø) (2 cond.)
	Shielding	Aluminium foil	Al-mylar, 100% coverage - 25% Overlap
			Drain wire
		Overall shielding	Aluminium foil
	Drain wire	BC 1 x 0.404 mm (Ø) (OFC)	
	Braiding	AL-MG 16 x 12 x 0.12 mm (Ø)	
Outer jacket	Material	PVC 8 mm (Ø)	
	Colours	Black	
Inner conductor	Material	BC 1 x 0.404 mm (Ø) (OFC) (5 pair)	
		TC 7 x 0.16 mm (Ø) (OFC) (1 pair)	
	American Wire Gauge	26 AWG (5 pair)	
		26 AWG (1 pair)	
		26 AWG (2 cond.)	

Mechanical Characteristics:

Temperature range	Fixed installation	- 40 °C till + 80 °C
	Flexible installation	- 15 °C till + 60 °C
Bending radius	Fixed installation	6 x outer diameter
	Flexible installation	8 x outer diameter