


INSTALLATION MANUAL

WB45SI/FS Flush mount box for wall panel - Solid wall



STEP 1

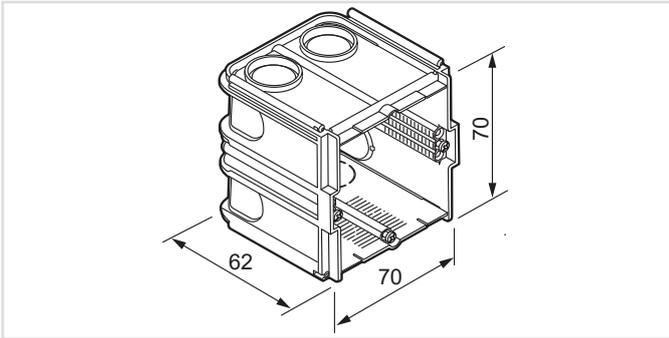


Prepare a hole on the mounting location in the surface. WB45SI/FS is compatible with the WP2xx series, NWPxxx series and NCP105. For the perfect fit with the NWP222, two WB45SI/FS shall be connected to each other.

Make sure the dimensions match the depth and size measurement for the desired wall panel installation with a single or combined flush mount box.

Double-check if there are no cables or other obstructions behind the mounting surface before making the hole.


STEP 2 (ONLY FOR NWP222)

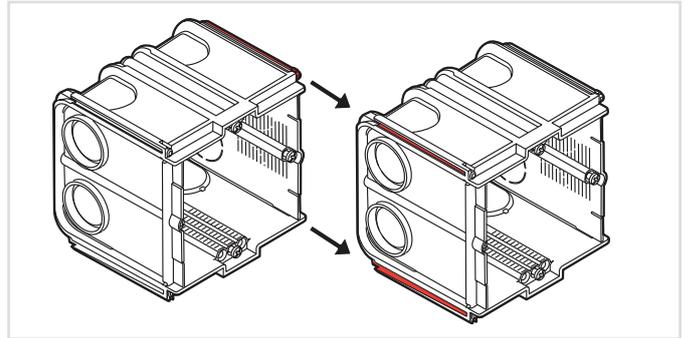

To use the WB45SI/FS with the NWP222, connect two flush mount boxes by sliding the rail connections on the sides to form the combined flush mount box.


Make sure the connection between the two flush mount boxes is secure.

STEP 3 (ONLY FOR NWP222)

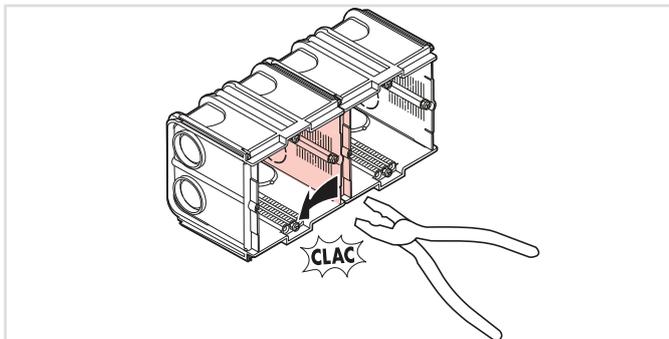

Remove the side walls between the combined flush mount boxes using a plier. This would open enough space for NWP222 to fit in.

STEP 4

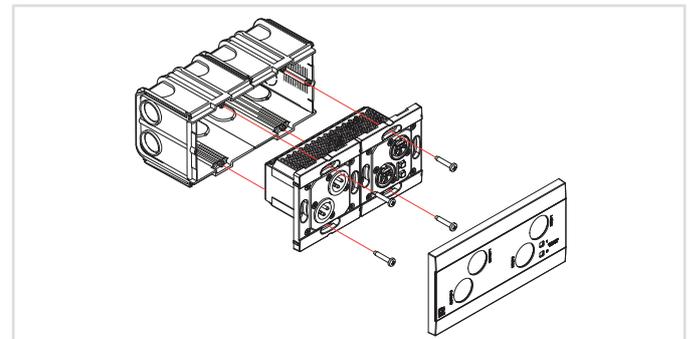

First, plug the twisted pair cable (CAT5E or better) into the wall panel. RJ45 port is located on the back of the wall panel. Then, install the wall panel into the single or combined flush mount box by tightening the screws of the wall panel using a screwdriver. Finally, snap and mount the front panel.