



# Basic series

★★★★★



This catalogue is made with care and attention for details and is as complete as possible on publication date. Due to the fact our products, documentation and products range are continuously improved and expanded, updates may have occurred since publication date.

To be always up to date with the latest improvements and additions or to obtain additional product information, please visit the product page on our website [procab.be](http://procab.be)

# INDEX

Audio cables	5
Multistage blocks	19
Video cables	21
Data cables	25
Adapters	29
Connectors	35

## **PROCAB BASIC SERIES CATALOG**

The BASIC premade cable series from PROCAB consists of a complete line of audio, video and data cables that you will need in your installations. These reasonably priced cables can be used for fixed installations as well as mobile applications. The connectors used in this range consist out of a combination of molded and solder connections. Combined with the flexibility of the cables themselves, makes this series ideal to fit in a very wide range of applications.



# Audio cables



## CAB304



### DESCRIPTION

XLR male to  
Banana

### CONNECTORS

VC3MX  
VCB20

Code	Length
CAB304/1.5	1.5 m

### CABLE SPECIFICATIONS TYPE : LS15

- › Flexible PVC jacket
- › 1.5 mm<sup>2</sup> (16 AWG) thin and dense stranded conductors
- › Ø 8 mm outer diameter
- › Oxygen free copper conductors



## CAB305



### DESCRIPTION

XLR female to  
Banana

### CONNECTORS

VC3FX  
VCB20

Code	Length
CAB305/1.5	1.5 m

### CABLE SPECIFICATIONS TYPE : LS15

- › Flexible PVC jacket
- › 1.5 mm<sup>2</sup> (16 AWG) thin and dense stranded conductors
- › Ø 8 mm outer diameter
- › Oxygen free copper conductors



## CAB502



### DESCRIPTION

Speaker female to  
Speaker female

### CONNECTORS

VCL4FC

Code	Length
CAB502/1.5	1.5 m
CAB502/3	3 m
CAB502/5	5 m
CAB502/10	10 m
CAB502/15	15 m
CAB502/20	20 m

### CABLE SPECIFICATIONS TYPE : LS25

- › Flexible PVC jacket
- › 2.5 mm<sup>2</sup> (16 AWG) thin and dense stranded conductors
- › Ø 9 mm outer diameter
- › Oxygen free copper conductors



### SAME CONNECTIVITY

★★★★★ Prime series : PRA502



## CAB504



### DESCRIPTION

Speaker female to  
Speaker female

### CONNECTORS

VCL4FC

Code	Length
CAB504/1.5	1.5 m
CAB504/3	3 m
CAB504/5	5 m
CAB504/10	10 m
CAB504/15	15 m
CAB504/20	20 m


### SAME CONNECTIVITY

★★★★★ Prime series : PRA504

### CABLE SPECIFICATIONS

#### TYPE : LS425

- › Flexible PVC jacket
- › 4 conductors for 2-channel loudspeaker connection
- › 2.5 mm<sup>2</sup> (16 AWG) thin and dense stranded conductors
- › Ø 12 mm outer diameter
- › Oxygen free copper conductors



## CAB590



### DESCRIPTION

6.3 mm Jack male to  
6.3 mm Jack male

### CONNECTORS

VCJ2MX

Code	Length
CAB590/10	10 m

### SAME CONNECTIVITY

★★★★★ Classic series : CLA590

### CABLE SPECIFICATIONS

#### TYPE : LS15

- › Flexible PVC jacket
- › 1.5 mm<sup>2</sup> (16 AWG) thin and dense stranded conductors
- › Ø 8 mm outer diameter
- › Oxygen free copper conductors



## CAB591



### DESCRIPTION

6.3 mm Jack male to  
XLR female

### CONNECTORS

VC3FX

VCJ2MX

Code	Length
CAB591/10	10 m

### SAME CONNECTIVITY

★★★★★ Classic series : CLA591

### CABLE SPECIFICATIONS

#### TYPE : LS15

- › Flexible PVC jacket
- › 1.5 mm<sup>2</sup> (16 AWG) thin and dense stranded conductors
- › Ø 8 mm outer diameter
- › Oxygen free copper conductors



## CAB592



### DESCRIPTION

Speaker female to  
6.3 mm Jack male


### CONNECTORS

VCL4FC  
VCJ2MX

Code	Length
CAB592/10	10 m

### CABLE SPECIFICATIONS TYPE : LS15

- › Flexible PVC jacket
- › 1.5 mm<sup>2</sup> (16 AWG) thin and dense stranded conductors
- › Ø 8 mm outer diameter
- › Oxygen free copper conductors



## CAB595



### DESCRIPTION

XLR male to  
XLR female

### CONNECTORS

VC3MX  
VC3FX

Code	Length
CAB595/10	10 m

### CABLE SPECIFICATIONS TYPE : LS15

- › Flexible PVC jacket
- › 1.5 mm<sup>2</sup> (16 AWG) thin and dense stranded conductors
- › Ø 8 mm outer diameter
- › Oxygen free copper conductors



### SAME CONNECTIVITY

★★★★★ Classic series : CLA595

## CAB600



### DESCRIPTION

6.3 mm Jack male to  
6.3 mm Jack male

Code	Length
CAB600/1.5	1.5 m
CAB600/3	3 m
CAB600/5	5 m
CAB600/10	10 m

### CABLE SPECIFICATIONS TYPE : MC305

- › Flexible PVC jacket
- › 24 AWG thin and dense stranded conductors
- › Ø 6 mm outer diameter
- › Spiral shielding
- › Oxygen free copper conductors



### SAME CONNECTIVITY

★★★★★ Classic series : CLA600  
★★★★★ Reference series : REF600  
★★★★★ Prime series : PRA600



## CAB601



### DESCRIPTION

6.3 mm Jack male to  
6.3 mm Jack male

### CONNECTORS

VCJ2MX

Code	Length
CAB601/3	3 m
CAB601/5	5 m
CAB601/10	10 m

### SAME CONNECTIVITY

★★★★★ Classic series : CLA600


★★★★★ Reference series : REF600

★★★★★ Prime series : PRA600

### CABLE SPECIFICATIONS

#### TYPE : MC305

- > Flexible PVC jacket
- > 24 AWG thin and dense stranded conductors
- > Ø 6 mm outer diameter
- > Spiral shielding
- > Oxygen free copper conductors



## CAB610



### DESCRIPTION

6.3 mm Jack male stereo to  
6.3 mm Jack male stereo

Code	Length
CAB610/1.5	1.5 m
CAB610/3	3 m
CAB610/5	5 m
CAB610/10	10 m

### SAME CONNECTIVITY

★★★★★ Classic series : CLA610

★★★★★ Reference series : REF610

★★★★★ Prime series : PRA610

### CABLE SPECIFICATIONS

#### TYPE : MC305

- > Flexible PVC jacket
- > 24 AWG thin and dense stranded conductors
- > Ø 6 mm outer diameter
- > Spiral shielding
- > Oxygen free copper conductors



## CAB631



### DESCRIPTION

2 x 6.3 mm Jack male to  
2 x RCA / Cinch male

Code	Length
CAB631/1.5	1.5 m
CAB631/3	3 m
CAB631/5	5 m

### SAME CONNECTIVITY


★★★★★ Classic series : CLA631

★★★★★ Reference series : REF631

### CABLE SPECIFICATIONS

#### TYPE : SIG48

- > Flexible PVC jacket
- > 25 AWG thin and dense stranded conductors
- > Ø 4 x 8 mm outer diameter
- > Spiral shielding
- > Oxygen free copper



## CAB701



### DESCRIPTION

2 x XLR male to  
2 x RCA / Cinch male

### CONNECTORS

VC3MX

Code	Length
CAB701/1.5	1.5 m
CAB701/3	3 m

### SAME CONNECTIVITY


★★★★★ Classic series : CLA701

★★★★★ Reference series : REF701

### CABLE SPECIFICATIONS

#### TYPE : SIG48

- > Flexible PVC jacket
- > 25 AWG thin and dense stranded conductors
- > Ø 4 x 8 mm outer diameter
- > Spiral shielding
- > Oxygen free copper



## CAB703



### DESCRIPTION

XLR male to  
2 x RCA / Cinch male

### CONNECTORS

VC3MX

Code	Length
CAB703/1.5	1.5 m
CAB703/3	3 m
CAB703/5	5 m
CAB703/10	10 m

### SAME CONNECTIVITY


★★★★★ Classic series : CLA703

★★★★★ Reference series : REF703

### CABLE SPECIFICATIONS

#### TYPE : SIG48

- > Flexible PVC jacket
- > 25 AWG thin and dense stranded conductors
- > Ø 4 x 8 mm outer diameter
- > Spiral shielding
- > Oxygen free copper



## CAB704



### DESCRIPTION

XLR female to  
2 x RCA / Cinch male

### CONNECTORS

VC3FX

Code	Length
CAB704/1.5	1.5 m
CAB704/3	3 m


### SAME CONNECTIVITY

★★★★★ Reference series : REF704

### CABLE SPECIFICATIONS

#### TYPE : SIG48

- > Flexible PVC jacket
- > 25 AWG thin and dense stranded conductors
- > Ø 4 x 8 mm outer diameter
- > Spiral shielding
- > Oxygen free copper





## CAB705



### DESCRIPTION

2 x XLR female to  
2 x RCA / Cinch male

### CONNECTORS

VC3FX

Code	Length
CAB705/1.5	1.5 m
CAB705/3	3 m

### SAME CONNECTIVITY


★★★★★ Classic series : CLA705

★★★★★ Reference series : REF705

### CABLE SPECIFICATIONS

#### TYPE : SIG48

- › Flexible PVC jacket
- › 25 AWG thin and dense stranded conductors
- › Ø 4 x 8 mm outer diameter
- › Spiral shielding
- › Oxygen free copper



## CAB707



### DESCRIPTION

2 x XLR female to  
2 x 6.3 mm Jack male

### CONNECTORS

VC3FX

Code	Length
CAB707/1.5	1.5 m
CAB707/3	3 m

### SAME CONNECTIVITY


★★★★★ Classic series : CLA707

★★★★★ Reference series : REF707

### CABLE SPECIFICATIONS

#### TYPE : SIG48

- › Flexible PVC jacket
- › 25 AWG thin and dense stranded conductors
- › Ø 4 x 8 mm outer diameter
- › Spiral shielding
- › Oxygen free copper



## CAB708



### DESCRIPTION

2 x XLR male to  
2 x 6.3 mm Jack male

### CONNECTORS

VC3MX

Code	Length
CAB708/1.5	1.5 m
CAB708/3	3 m

### SAME CONNECTIVITY


★★★★★ Classic series : CLA708

★★★★★ Reference series : REF708

### CABLE SPECIFICATIONS

#### TYPE : SIG48

- › Flexible PVC jacket
- › 25 AWG thin and dense stranded conductors
- › Ø 4 x 8 mm outer diameter
- › Spiral shielding
- › Oxygen free copper



## CAB709



### DESCRIPTION

6.3 mm Jack male stereo to  
XLR male and XLR female

### CONNECTORS

VC3MX  
VC3FX


Code	Length
CAB709/0.6	0.6 m
CAB709/3	3 m
CAB709/5	5 m

### SAME CONNECTIVITY

★★★★★ Classic series : CLA709  
★★★★★ Reference series : REF709

### CABLE SPECIFICATIONS TYPE : SIG48

- › Flexible PVC jacket
- › 25 AWG thin and dense stranded conductors
- › Ø 4 x 8 mm outer diameter
- › Spiral shielding
- › Oxygen free copper



## CAB710



### DESCRIPTION

2 x XLR female to  
2 x XLR male

### CONNECTORS

VC3MX  
VC3FX


Code	Length
CAB710/0.5	0.5 m
CAB710/1	1 m
CAB710/1.5	1.5 m
CAB710/3	3 m

### SAME CONNECTIVITY

★★★★★ Classic series : CLA710  
★★★★★ Reference series : REF710

### CABLE SPECIFICATIONS TYPE : SIG48

- › Flexible PVC jacket
- › 25 AWG thin and dense stranded conductors
- › Ø 4 x 8 mm outer diameter
- › Spiral shielding
- › Oxygen free copper



## CAB711



### DESCRIPTION

3.5 mm Jack male stereo to  
2 x RCA / Cinch male

Code	Length
CAB711/1.5	1.5 m
CAB711/3	3 m
CAB711/5	5 m
CAB711/10	10 m
CAB711/15	15 m
CAB711/20	20 m

### SAME CONNECTIVITY

★★★★★ Classic series : CLA711  
★★★★★ Reference series : REF711

### CABLE SPECIFICATIONS TYPE : SIG48

- › Flexible PVC jacket
- › 25 AWG thin and dense stranded conductors
- › Ø 4 x 8 mm outer diameter
- › Spiral shielding
- › Oxygen free copper







## CAB712



### DESCRIPTION

3.5 mm Jack male stereo to  
2 x XLR male

### CONNECTORS

VC3MX


Code	Length
CAB712/1.5	1.5 m
CAB712/3	3 m

### SAME CONNECTIVITY

- ★★★★★ Classic series : CLA712
- ★★★★★ Reference series : REF712

### CABLE SPECIFICATIONS TYPE : SIG48

- › Flexible PVC jacket
- › 25 AWG thin and dense stranded conductors
- › Ø 4 x 8 mm outer diameter
- › Spiral shielding
- › Oxygen free copper



## CAB713



### DESCRIPTION

3.5 mm Jack male stereo to  
2 x 6.3 mm Jack male


Code	Length
CAB713/1.5	1.5 m
CAB713/3	3 m

### SAME CONNECTIVITY

- ★★★★★ Classic series : CLA713
- ★★★★★ Reference series : REF713

### CABLE SPECIFICATIONS TYPE : SIG48

- › Flexible PVC jacket
- › 25 AWG thin and dense stranded conductors
- › Ø 4 x 8 mm outer diameter
- › Spiral shielding
- › Oxygen free copper



## CAB714S



### DESCRIPTION

XLR male to  
3.5 mm Jack male stereo

### CONNECTORS

VC3MX

Code	Length
CAB714S/1.5	1.5 m
CAB714S/3	3 m

### SAME CONNECTIVITY

- ★★★★★ Reference series : REF714

### CABLE SPECIFICATIONS TYPE : SIG48

- › Flexible PVC jacket
- › 25 AWG thin and dense stranded conductors
- › Ø 4 x 8 mm outer diameter
- › Spiral shielding
- › Oxygen free copper



## CAB715



### DESCRIPTION

6.3 mm Jack male to  
2 x RCA / Cinch male

Code	Length
CAB715/1.5	1.5 m
CAB715/3	3 m

### CABLE SPECIFICATIONS TYPE : SIG48

- › Flexible PVC jacket
- › 25 AWG thin and dense stranded conductors
- › Ø 4 x 8 mm outer diameter
- › Spiral shielding
- › Oxygen free copper



## CAB719



### DESCRIPTION

6.3 mm Jack male stereo to  
2 x RCA / Cinch male

Code	Length
CAB719/1.5	1.5 m
CAB719/3	3 m

### SAME CONNECTIVITY

- ★★★★★ Classic series : CLA719
- ★★★★★ Reference series : REF719

### CABLE SPECIFICATIONS TYPE : SIG48

- › Flexible PVC jacket
- › 25 AWG thin and dense stranded conductors
- › Ø 4 x 8 mm outer diameter
- › Spiral shielding
- › Oxygen free copper



## CAB721



### DESCRIPTION

6.3 mm Jack male stereo to  
2 x 6.3 mm Jack male

Code	Length
CAB721/1.5	1.5 m
CAB721/3	3 m

### SAME CONNECTIVITY

- ★★★★★ Classic series : CLA721
- ★★★★★ Reference series : REF721

### CABLE SPECIFICATIONS TYPE : SIG48

- › Flexible PVC jacket
- › 25 AWG thin and dense stranded conductors
- › Ø 4 x 8 mm outer diameter
- › Spiral shielding
- › Oxygen free copper





## CAB723



### DESCRIPTION

XLR female to  
6.3 mm Jack male stereo

### CONNECTORS

VC3FX

Code	Length
CAB723/1.5	1.5 m

### SAME CONNECTIVITY

- ★★★★★ Classic series : CLA723
- ★★★★★ Reference series : REF723
- ★★★★★ Prime series : PRA723

### CABLE SPECIFICATIONS TYPE : MC305

- › Flexible PVC jacket
- › 24 AWG thin and dense stranded conductors
- › Ø 6 mm outer diameter
- › Spiral shielding
- › Oxygen free copper conductors



## CAB724



### DESCRIPTION

XLR male to  
6.3 mm Jack male stereo

### CONNECTORS

VC3MX

Code	Length
CAB724/1.5	1.5 m
CAB724/3	3 m
CAB724/5	5 m
CAB724/10	10 m

### SAME CONNECTIVITY

- ★★★★★ Classic series : CLA724
- ★★★★★ Reference series : REF724
- ★★★★★ Prime series : PRA724

### CABLE SPECIFICATIONS TYPE : MC305

- › Flexible PVC jacket
- › 24 AWG thin and dense stranded conductors
- › Ø 6 mm outer diameter
- › Spiral shielding
- › Oxygen free copper conductors



## CAB725



### DESCRIPTION

RCA / Cinch male to  
2 x RCA / Cinch male

Code	Length
CAB725/1.5	1.5 m

### SAME CONNECTIVITY

- ★★★★★ Classic series : CLA725

### CABLE SPECIFICATIONS TYPE : SIG48

- › Flexible PVC jacket
- › 25 AWG thin and dense stranded conductors
- › Ø 4 x 8 mm outer diameter
- › Spiral shielding
- › Oxygen free copper



## CAB727



### DESCRIPTION

RCA / Cinch male to  
2 x RCA / Cinch female

Code	Length
CAB727/0.25	0.25 m

### CABLE SPECIFICATIONS TYPE : SIG48

- › Flexible PVC jacket
- › 25 AWG thin and dense stranded conductors
- › Ø 4 x 8 mm outer diameter
- › Spiral shielding
- › Oxygen free copper



## CAB733



### DESCRIPTION

6.3 mm Jack male stereo to  
2 x XLR male


### CONNECTORS

VC3MX

Code	Length
CAB733/1.5	1.5 m

### CABLE SPECIFICATIONS TYPE : SIG48

- › Flexible PVC jacket
- › 25 AWG thin and dense stranded conductors
- › Ø 4 x 8 mm outer diameter
- › Spiral shielding
- › Oxygen free copper



## CAB734



### DESCRIPTION

6.3 mm Jack male stereo to  
2 x XLR female


### CONNECTORS

VC3FX

Code	Length
CAB734/1.5	1.5 m

### CABLE SPECIFICATIONS TYPE : SIG48

- › Flexible PVC jacket
- › 25 AWG thin and dense stranded conductors
- › Ø 4 x 8 mm outer diameter
- › Spiral shielding
- › Oxygen free copper





## CAB735



### DESCRIPTION

XLR female to  
2 x XLR male

### CONNECTORS

VC3FX  
VC3MX


Code	Length
CAB735/1.5	1.5 m

### SAME CONNECTIVITY

★★★★★ Classic series : CLA735  
★★★★★ Reference series : REF735  
★★★★★ Prime series : PRA735

### CABLE SPECIFICATIONS TYPE : SIG58

- › Flexible PVC jacket
- › 25 AWG thin and dense stranded conductors
- › Ø 4 x 8 mm outer diameter
- › Spiral shielding
- › Oxygen free copper



## CAB736



### DESCRIPTION

XLR male to  
2 x XLR female

### CONNECTORS

VC3MX  
VC3FX


Code	Length
CAB736/1.5	1.5 m

### SAME CONNECTIVITY

★★★★★ Classic series : CLA736  
★★★★★ Reference series : REF736  
★★★★★ Prime series : PRA736

### CABLE SPECIFICATIONS TYPE : SIG58

- › Flexible PVC jacket
- › 25 AWG thin and dense stranded conductors
- › Ø 4 x 8 mm outer diameter
- › Spiral shielding
- › Oxygen free copper



## CAB800



### DESCRIPTION

2 x RCA / Cinch male to  
2 x RCA / Cinch male

Code	Length
CAB800/0.5	0.5 m
CAB800/1	1 m
CAB800/1.5	1.5 m
CAB800/3	3 m
CAB800/5	5 m
CAB800/10	10 m
CAB800/15	15 m
CAB800/20	20 m

### SAME CONNECTIVITY

★★★★★ Classic series : CLA800  
★★★★★ Reference series : REF800

### CABLE SPECIFICATIONS TYPE : SIG48

- › Flexible PVC jacket
- › 25 AWG thin and dense stranded conductors
- › Ø 4 x 8 mm outer diameter
- › Spiral shielding
- › Oxygen free copper



## CAB850



### DESCRIPTION

2 x RCA / Cinch female to  
2 x RCA / Cinch male

Code	Length
CAB850/1.5	1.5 m
CAB850/3	3 m
CAB850/5	5 m

### SAME CONNECTIVITY

★★★★★ Classic series : CLA850  
★★★★★ Reference series : REF850

### CABLE SPECIFICATIONS TYPE : SIG48

- > Flexible PVC jacket
- > 25 AWG thin and dense stranded conductors
- > Ø 4 x 8 mm outer diameter
- > Spiral shielding
- > Oxygen free copper



## CAB900



### DESCRIPTION

6.3 mm Jack male to  
XLR female

### CONNECTORS

VCJ2MX  
VC3FX

Code	Length
CAB900/3	3 m
CAB900/5	5 m
CAB900/10	10 m

### CABLE SPECIFICATIONS TYPE : MC305

- > Flexible PVC jacket
- > 24 AWG thin and dense stranded conductors
- > Ø 6 mm outer diameter
- > Spiral shielding
- > Oxygen free copper conductors



### SAME CONNECTIVITY

★★★★★ Classic series : CLA900  
★★★★★ Reference series : REF900  
★★★★★ Prime series : PRA900

## CAB901



### DESCRIPTION

XLR male to  
XLR female

### CONNECTORS

VC3MX  
VC3FX

Code	Length
CAB901/0.5	0.5 m
CAB901/1	1 m
CAB901/1.5	1.5 m
CAB901/3	3 m
CAB901/5	5 m
CAB901/10	10 m
CAB901/15	15 m
CAB901/20	20 m
CAB901/25	25 m
CAB901/30	30 m

### CABLE SPECIFICATIONS TYPE : MC305

- > Flexible PVC jacket
- > 24 AWG thin and dense stranded conductors
- > Ø 6 mm outer diameter
- > Spiral shielding
- > Oxygen free copper conductors



### SAME CONNECTIVITY

★★★★★ Classic series : CLA901  
★★★★★ Reference series : REF901  
★★★★★ Prime series : PRA901

# Multistage blocks





The PROCAB multi stageblocks are made of solid metal.

In the audio recording and entertainment fields, stageblocks with 16 or 24 XLR connectors are commonplace, but PROCAB also offers smaller versions with 8 or 12 XLR connectors as well as a bigger model with 40 XLR connectors.

Every stageblock comes supplied with necessary connectors and matching transport/protection bag.

When you need to cover a long-distance to a stage with a lot of cables, you'll find our stageblocks will be the ideal solution.



## MSB108.0/x

### CONNECTIVITY

8 x XLR female to  
8 x XLR male

### DIMENSIONS

10 (W) x 7.5 (H) x 39 (D) cm

### LENGTH

10 meter (MSB108.0/10)



## MSB112.0/x

### CONNECTIVITY

12 x XLR female to  
12 x XLR male

### DIMENSIONS

18 (W) x 8.5 (H) x 27 (D) cm

### LENGTH

10 meter (MSB112.0/10)



## MSB112.4/x

### CONNECTIVITY

12 x XLR female + 4 x XLR male to  
4 x XLR female + 12 x XLR male

### DIMENSIONS

18 (W) x 8.5 (H) x 33 (D) cm

### LENGTH

10 meter (MSB112.4/10)  
30 meter (MSB112.4/30)



## MSB116.8/x

### CONNECTIVITY

16 x XLR female + 8 x XLR male to  
16 x XLR male + 8 x XLR female

### DIMENSIONS

18 (W) x 8.5 (H) x 39 (D) cm

### LENGTH

10 meter (MSB116.8/10)  
20 meter (MSB116.8/20)



## MSB120.4/x

### CONNECTIVITY

20 x XLR female + 4 x XLR male to  
4 x XLR female + 20 x XLR male

### DIMENSIONS

18 (W) x 8.5 (H) x 39 (D) cm

### LENGTH

30 meter (MSB120.4/30)



## MSB128.4/x

### CONNECTIVITY

28 x XLR female + 4 x XLR male to  
4 x XLR female + 28 x XLR male

### DIMENSIONS

18 (W) x 8.5 (H) x 39 (D) cm

### LENGTH

30 meter (MSB128.4/30)



## MSB132.8/x

### CONNECTIVITY

32 x XLR female + 8 x XLR male to  
8 x XLR female + 32 x XLR male

### DIMENSIONS

18 (W) x 8.5 (H) x 50 (D) cm

### LENGTH

30 meter (MSB132.8/30)



# Video cables



## BSV101



### DESCRIPTION

Swivel connected HDMI A to HDMI A

Code	Length
BSV101/1	1 m
BSV101/2	2 m
BSV101/3	3 m

AWG : 30

### SAME CONNECTIVITY

★★★★★ Classic series : CLV100

### CABLE SPECIFICATIONS TYPE : BDD100

- > Flexible PVC jacket
- > 30 AWG thin and dense stranded conductors
- > Triple shielding (2 x Al-foil + Braiding)
- > Oxygen free copper



## BSV103



### DESCRIPTION

Single locking HDMI A to HDMI A

High speed HDMI with Ethernet Channel

Code	Length
BSV103/1	1 m
BSV103/2	2 m
BSV103/3	3 m

AWG : 30

### SAME CONNECTIVITY

★★★★★ Classic series : CLV100

### CABLE SPECIFICATIONS TYPE : BDD100

- > Flexible PVC jacket
- > 30 AWG thin and dense stranded conductors
- > Triple shielding (2 x Al-foil + Braiding)
- > Oxygen free copper



## BSV104



### DESCRIPTION

Double locking HDMI A to HDMI A

High speed HDMI with Ethernet Channel

Code	Length
BSV104/1	1 m
BSV104/2	2 m
BSV104/3	3 m

AWG : 30

### SAME CONNECTIVITY

★★★★★ Classic series : CLV100

### CABLE SPECIFICATIONS TYPE : BDD100

- > Flexible PVC jacket
- > 30 AWG thin and dense stranded conductors
- > Triple shielding (2 x Al-foil + Braiding)
- > Oxygen free copper





## BSV110



### DESCRIPTION

HDMI A to  
HDMI A

Code	Length
BSV110/0.5	0.5 m
BSV110/1	1 m
BSV110/1.5	1.5 m
BSV110/3	3 m
BSV110/5	5 m
BSV110/10	10 m

### SAME CONNECTIVITY

★★★★★ Classic series : CLV100

### CABLE SPECIFICATIONS TYPE : BHD130 & BHD128

- › Flexible PVC jacket
- › Ethernet support
- › Audio return channel
- › Thin and dense stranded conductors
- › Triple shielding (2 x Al-foil + Braiding)
- › Oxygen free copper



AWG : 30 (<5 m)

AWG : 28 (10 m)

## BSV150



### DESCRIPTION

Display port to  
Display port

Code	Length
BSV150/1.5	1.5 m
BSV150/3	3 m
BSV150/5	5 m

### CABLE SPECIFICATIONS TYPE : BDP130 & BDP128

- › Flexible PVC jacket
- › Latching connectors
- › DisplayPort 1.2 compliant
- › Thin and dense stranded conductors
- › Triple shielding
- › Oxygen free copper

AWG : 30 (<5 m)

AWG : 28 (≥5 m)



# Data cables



## CAM400



### DESCRIPTION

Midi male to  
Midi male

Code	Length
CAM400/0.5	0.5 m
CAM400/1	1 m
CAM400/1.5	1.5 m
CAM400/3	3 m
CAM400/5	5 m
CAM400/10	10 m

### SAME CONNECTIVITY

★★★★★ Classic series : CLD400  
★★★★★ Reference series : CXM400

### CABLE SPECIFICATIONS

#### TYPE : CAM400

- › Flexible PVC jacket
- › 26 AWG thin and dense stranded conductors
- › Ø 5.0 mm outer diameter
- › Spiral shielding
- › Oxygen free copper

## BSD550U



### DESCRIPTION

CAT5E RJ45 to  
RJ45 U/UTP networking cable

Code	Length
BSD550U/0.5	0.5 m
BSD550U/1	1 m
BSD550U/1.5	1.5 m
BSD550U/2	2 m
BSD550U/3	3 m



### SAME CONNECTIVITY

★★★★★ Classic series : CLD500

### CABLE SPECIFICATIONS

#### TYPE : BDC526U

- › Flexible PVC jacket
- › 26 AWG stranded conductors
- › Ø 5.3 mm outer diameter
- › Oxygen free copper
- › Wired according to ANSI/TIA/EIA 568B (Straight)

## BSD560F



### DESCRIPTION

CAT6 RJ45 to  
RJ54 F/UTP networking cable

Code	Length
BSD560F/0.5	0.5 m
BSD560F/1	1 m
BSD560F/1.5	1.5 m
BSD560F/2	2 m
BSD560F/3	3 m



### SAME CONNECTIVITY

★★★★★ Classic series : CLD500

### CABLE SPECIFICATIONS

#### TYPE : BDC626F

- › Flexible PVC jacket
- › 26 AWG stranded conductors
- › Ø 6.3 mm outer diameter
- › Al-foil shielding
- › Oxygen free copper
- › Wired according to ANSI/TIA/EIA 568B (Straight)

## BSD550UX



### DESCRIPTION

Crossover CAT5E RJ45 to RJ45 U/UTP networking cable

Code	Length
BSD550UX/1.5	1.5 m

### CABLE SPECIFICATIONS

#### TYPE : BDC526U

- › Crossover pin configuration
- › Flexible PVC jacket
- › 26 AWG stranded conductors
- › Ø 5.3 mm outer diameter
- › Oxygen free copper



## BXD602



### DESCRIPTION

USB A male to female extender cable

Code	Length
BXD602/12	12 m

### CABLE SPECIFICATIONS


- › Extends the distance to your USB device(s) up to 12 meters
- › USB specification version 2.0 / 1.1 compliant
- › Plug & play. No additional driver required
- › Up to 5 extender cables can be chained for a distance up to 60 meters
- › Lockable mechanic design for secure connection
- › Bus powered. No power adapter required







# Adapters

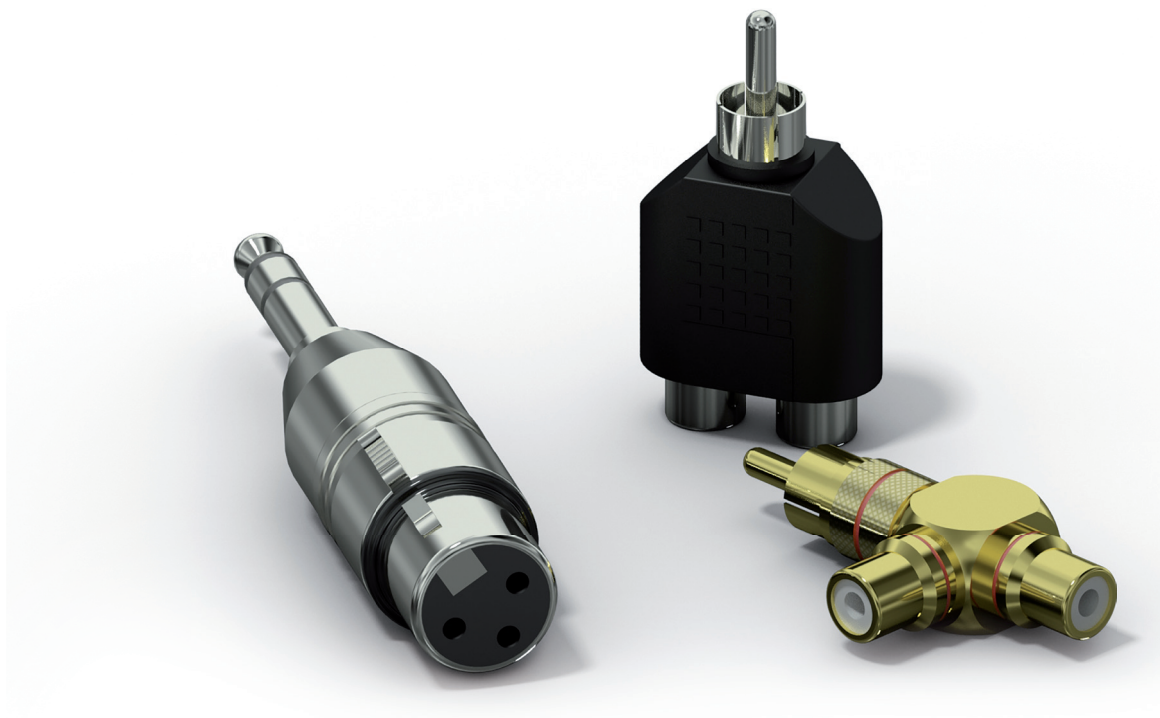



VC101

RCA / CINCH FEMALE TO XLR FEMALE

Code  
VC101  
VC101-P

SAME CONNECTIVITY  
★★★★★ Classic series : CLP101



VC102

RCA / CINCH FEMALE TO XLR MALE

Code  
VC102  
VC102-P

SAME CONNECTIVITY  
★★★★★ Classic series : CLP102



VC103

RCA / CINCH MALE TO 6.3 MM JACK FEMALE

Code  
VC103  
VC103-P

SAME CONNECTIVITY  
★★★★★ Classic series : CLP103



VC104

RCA / CINCH FEMALE TO 6.3 MM JACK MALE

Code  
VC104  
VC104-P

SAME CONNECTIVITY  
★★★★★ Classic series : CLP104



VC106

2 X RCA / CINCH FEMALE TO RCA / CINCH MALE

Code  
VC106  
VC106-P

SAME CONNECTIVITY  
★★★★★ Classic series : CLP106



VC107

RCA / CINCH FEMALE TO RCA / CINCH FEMALE

Code  
VC107  
VC107-P

SAME CONNECTIVITY  
★★★★★ Classic series : CLP107



## VC110

XLR FEMALE TO 6.3 MM JACK FEMALE STEREO

Code

VC110

VC110-P

SAME CONNECTIVITY

★★★★★ Classic series : CLP110



## VC115

XLR MALE TO 6.3 MM JACK FEMALE STEREO

Code

VC115

VC115-P

SAME CONNECTIVITY

★★★★★ Classic series : CLP115



## VC120

XLR FEMALE TO 6.3 MM JACK MALE STEREO

Code

VC120

VC120-P

SAME CONNECTIVITY

★★★★★ Classic series : CLP120



## VC121

XLR FEMALE TO 6.3 MM JACK MALE


Code

VC121

VC121-P

SAME CONNECTIVITY

★★★★★ Classic series : CLP121



## VC125

XLR MALE TO 6.3 MM JACK MALE STEREO


Code

VC125

VC125-P

SAME CONNECTIVITY

★★★★★ Classic series : CLP125



## VC126

XLR MALE TO 6.3 MM JACK MALE

Code

VC126

VC126-P

SAME CONNECTIVITY

★★★★★ Classic series : CLP126



**VC130**  
XLR FEMALE TO RCA / CINCH MALE

Code  
VC130  
VC130-P


SAME CONNECTIVITY  
★★★★★ Classic series : CLP130



**VC135**  
XLR MALE TO RCA / CINCH MALE

Code  
VC135  
VC135-P

SAME CONNECTIVITY  
★★★★★ Classic series : CLP135

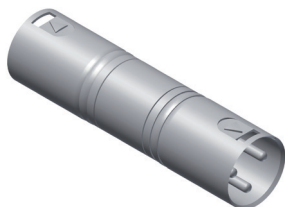

**VC140**  
XLR MALE TO XLR MALE

Code  
VC140  
VC140-P


SAME CONNECTIVITY  
★★★★★ Classic series : CLP140



**VC145**  
XLR FEMALE TO XLR FEMALE

Code  
VC145  
VC145-P

SAME CONNECTIVITY  
★★★★★ Classic series : CLP145

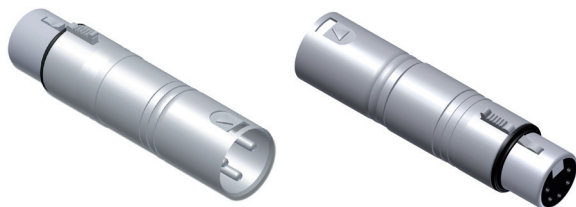


**VC150**  
XLR MALE 3-PIN STEREO TO XLR FEMALE 5-PIN DMX

Code  
VC150  
VC150-P



**VC155**  
XLR FEMALE 3-PIN STEREO TO XLR MALE 5-PIN DMX

Code  
VC155  
VC155-P




## VC215

RCA / CINCH MALE TO RCA / CINCH FEMALE 90° ANGLED

Code

VC215

VC215-P



## VC220

RCA / CINCH MALE TO 2 X RCA FEMALE STRAIGHT & 90° ANGLED

Code

VC220

VC220-P



## VCL4MM

4-PIN SPEAKER MALE TO 4-PIN SPEAKER MALE

Code

VCL4MM

VCL4MM-P



## VCL8MM

8-PIN SPEAKER MALE TO 8-PIN SPEAKER MALE



**BSP400**

HDMI 19 MALE TO DVI FEMALE

SAME CONNECTIVITY

★★★★★ Classic series : CLP342



**BSP410**

HDMI 19 FEMALE TO DVI 25 MALE DUAL LINK

SAME CONNECTIVITY

★★★★★ Classic series : CLP341



**BSP450**

HDMI 19 FEMALE TO HDMI 19 FEMALE WITH FIXSCREWS

SAME CONNECTIVITY

★★★★★ Classic series : CLP345



**BSP460**

HDMI 19 FEMALE TO HDMI 19 FEMALE 90° ANGLE



**BSP602**

PIGTAIL HDMI 19 FEMALE TO HDMI 19 FEMALE

Code	Color
BSP602/B	Black
BSP602/W	White




**BSP510**

DISPLAYPORT (MALE) TO HDMI (FEMALE) ADAPTER

# Connectors





★★★★★  
**VC3FDL** 3-PIN XLR FEMALE PANEL D-SIZE

Code	Packaging
VC3FDL	Plastic bag
VC3FDL-P	50 pack

**SAME CONNECTIVITY**

Connector only available in Procab Basic series.




**VC3FX** 3-PIN XLR FEMALE

Code	Packaging
VC3FX	Plastic bag
VC3FX-P	50 pack

**SAME CONNECTIVITY**

Connector only available in Procab Basic series.



★★★★★  
**VC3MDL** 3-PIN XLR MALE PANEL D-SIZE

Code	Packaging
VC3MDL	Plastic bag
VC3MDL-P	50 pack

**SAME CONNECTIVITY**

Connector only available in Procab Basic series.




**VC3MX** 3-PIN XLR MALE ★★★★★

Code	Packaging
VC3MX	Plastic bag
VC3MX-P	50 pack

**SAME CONNECTIVITY**

Connector only available in Procab Basic series.



★★★★★  
**VC5FDL** 5-PIN XLR FEMALE PANEL D-SIZE

Code	Packaging
VC5FDL	Plastic bag
VC5FDL-P	25 pack

**SAME CONNECTIVITY**

Connector only available in Procab Basic series.




**VC5FX** 5-PIN XLR FEMALE

Code	Packaging
VC5FX	Plastic bag
VC5FX-P	25 pack

**SAME CONNECTIVITY**

Connector only available in Procab Basic series.





## VC5MDL 5-PIN XLR MALE PANEL D-SIZE ★★★★★

Code	Packaging
VC5MDL	Plastic bag
VC5MDL-P	25 pack

### SAME CONNECTIVITY

Connector only available in Procab Basic series.



## VC5MX 5-PIN XLR MALE ★★★★★

Code	Packaging
VC5MX	Plastic bag
VC5MX-P	25 pack

### SAME CONNECTIVITY

Connector only available in Procab Basic series.



## VCJ2MX 6.3 MM JACK MALE

Code	Packaging
VCJ2MX	Plastic bag
VCJ2MX-P	25 pack

### SAME CONNECTIVITY

Connector only available in Procab Basic series.




## VCJ3MX 6.3 MM JACK MALE STEREO ★★★★★

Code	Packaging
VCJ3MX	Plastic bag
VCJ3MX-P	25 pack

### SAME CONNECTIVITY

Connector only available in Procab Basic series.



## VCJ3FP 6.3 MM JACK FEMALE STEREO PANEL ★★★★★

Code	Packaging
VCJ3FP	Plastic bag
VCJ3FP-P	25 pack

### SAME CONNECTIVITY

Connector only available in Procab Basic series.



## VCJ3FX 6.3 MM JACK FEMALE STEREO ★★★★★

Code	Packaging
VCJ3FX	Plastic bag
VCJ3FX-P	25 pack

### SAME CONNECTIVITY

Connector only available in Procab Basic series.



## VC209 RCA/CINCH MALE

★★★★★

Code	Packaging
VC209	Plastic bag
VC209-P	25 pack

### SAME CONNECTIVITY

Connector only available in Procab Basic series.



## VC210 RCA/CINCH FEMALE

★★★★★

Code	Packaging
VC210	Plastic bag
VC210-P	25 pack

### SAME CONNECTIVITY

Connector only available in Procab Basic series.



## VCL4FC 4-PIN SPEAKER FEMALE

★★★★★

Code	Packaging
VCL4FC	Plastic bag
VCL4FC-P	15 pack

### SAME CONNECTIVITY

Connector only available in Procab Basic series.



## VCL4MC 4-PIN SPEAKER MALE

★★★★★

Code	Packaging
VCL4MC	Plastic bag
VCL4MC-P	15 pack

### SAME CONNECTIVITY

Connector only available in Procab Basic series.



## VCL4MP 4-PIN SPEAKER MALE PANEL

★★★★★

Code	Packaging
VCL4MP	Plastic bag
VCL4MP-P	25 pack

### SAME CONNECTIVITY

Connector only available in Procab Basic series.



## VCL8MP 8-PIN SPEAKER MALE PANEL

★★★★★

Code	Packaging
VCL8MP	Plastic bag

### SAME CONNECTIVITY

Connector only available in Procab Basic series.




## VCL8FC 8-PIN SPEAKER FEMALE ★★★★★

Code	Packaging
VCL8FC	Plastic bag

### SAME CONNECTIVITY

Connector only available in Procab Basic series.



## VCB20 BANANA RED ★★★★★

Code	Packaging
VCB20	Plastic bag
VCB20-P	10 pack

### SAME CONNECTIVITY

Connector only available in Procab Basic series.



## VCB25 BANANA BLACK ★★★★★

Code	Packaging
VCB25	Plastic bag
VCB25-P	10 pack

### SAME CONNECTIVITY

Connector only available in Procab Basic series.

[illegible]

## Basic series Hanger packaging



- › Environmentally friendly
- › Very compact
- › Enables users to feel the cable quality

## PROCAB merchandising



Discover the full PROCAB merchandising range on  
[procab.be/merchandising](http://procab.be/merchandising)

# INDEX

BSD550U	26	CAB701	10	CAM400	26	VC126	31
BSD550UX	27	CAB703	10	MSB108.0/x	20	VC130	32
BSD560F	26	CAB704	10	MSB112.0/x	20	VC135	32
BSP400	34	CAB705	11	MSB112.4/x	20	VC140	32
BSP410	34	CAB707	11	MSB116.8/x	20	VC145	32
BSP450	34	CAB708	11	MSB120.4/x	20	VC150	32
BSP460	34	CAB709	12	MSB128.4/x	20	VC155	32
BSP510	34	CAB710	12	MSB132.8/x	20	VC209	38
BSP602	34	CAB711	12	VC3FDL	36	VC210	38
BSV101	22	CAB712	13	VC3FX	36	VC215	33
BSV103	22	CAB713	13	VC3MDL	36	VC220	33
BSV104	22	CAB714S	13	VC3MX	36	VCB20	39
BSV110	23	CAB715	14	VC5FDL	36	VCB25	39
BSV150	23	CAB719	14	VC5FX	36	VCJ2MX	37
BXD602	27	CAB721	14	VC5MDL	37	VCJ3FP	37
CAB304	6	CAB723	15	VC5MX	37	VCJ3FX	37
CAB305	6	CAB724	15	VC101	30	VCJ3MX	37
CAB502	6	CAB725	15	VC102	30	VCL4FC	38
CAB504	7	CAB727	16	VC103	30	VCL4MC	38
CAB590	7	CAB733	16	VC104	30	VCL4MM	33
CAB591	7	CAB734	16	VC106	30	VCL4MP	38
CAB592	8	CAB735	17	VC107	30	VCL8FC	39
CAB595	8	CAB736	17	VC110	31	VCL8MM	33
CAB600	8	CAB800	17	VC115	31	VCL8MP	38
CAB601	9	CAB850	18	VC120	31		
CAB610	9	CAB900	18	VC121	31		
CAB631	9	CAB901	18	VC125	31		

## PRIME SERIES



The Prime premade series from PROCAB offers you the highest class in cables. This series is specifically designed to withstand the harshest use and abuse that any rental and road application can throw at them. All connections are equipped with the highest quality connectors. Equipped with reliable Neutrik and PROCAB plugs, it ensures the most trustworthy communication. Besides the top-quality black connectors, the cables used in this series are designed to meet the highest standards. With the Highflex™, Ultraflex™ and Duraflex™ technologies implemented in the cables it provides you the right flexibility and solid feel when you need it most.

## CLASSIC SERIES



The Classic premade series from PROCAB offers a stunning line of cables and adapters that will satisfy any AV integrator. Not only the design but also the quality of the cables themselves is unheard of in its price range. The advantage of gold plated contacts and the connectors that are molded firmly on the cable make this the ideal solution for fixed installations and mobile use.

## BASIC SERIES



The BASIC premade cable series from PROCAB consists of a complete line of audio, video and data cables that you will need in your installations. These reasonably priced cables can be used for fixed installations as well as mobile applications. The connectors used in this range consist out of a combination of molded and solder connections. Combined with the flexibility of the cables themselves, makes this series ideal to fit in a very wide range of applications.

procab.be



AUDIO



VIDEO



DIGITAL



POWER