


### Highlights:

- In depth adjustable
- Stores up to 18 units of 19" Equipment
- Punched square holes for use with snap-in cage nuts
- 2 mm thick cold rolled steel frame
- Easy assembly in 10 minutes
- Floor standing & wall mounted use
- Unrestricted air flow due to open-frame design
- Stand alone & in-furniture integration
- Ships as flat-down package

### Product information:





The OPR318A is an in depth adjustable professional and solid constructed open frame rack for 19" equipment compliant to ANSI/EIA RS-310D, DIN41491 and IEC60297 standards which is suitable for wall mounted or floor standing installation. It ensures maximum installation, connectivity and maintenance ease storing up to 18 units of 19" equipment.


The open frame rack has an adjustable depth of 300 to 450 mm for easy installation and fitment in existing furniture. The rugged construction made of 2 mm thick steel allows pre-loading of the equipment before transportation to the installation site. Finishing is done in a black (RAL9004) powder coating with fine structure while punched equipment mounting profiles on front and both sides offer a multifunctional use of the cabinet. Delivered in a flat-down package, the simple structure allows assembly by a single person in a record-breaking time.

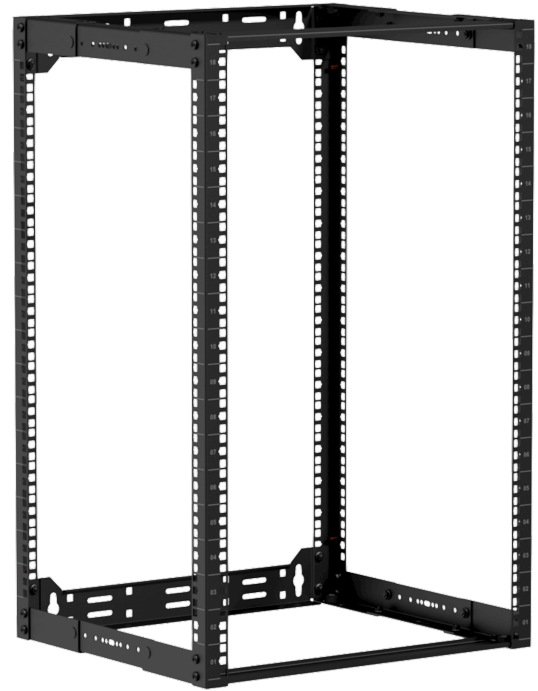

### Product Features:

Unit height	18 HE
Max. usable depth	300 ~ 450 mm
Max. load standing	100 kg
Max. load hanging	50 kg
Dimensions	520 x 825 x 300~450 mm (W x H x D) (excl. rubber feet)
Colours	Black (RAL9004)
Weight	10 kg
Accessories	Included
	4 x Levelling feet
	4 x M8 expanding wall bolt
	24 x Cage nuts + screws

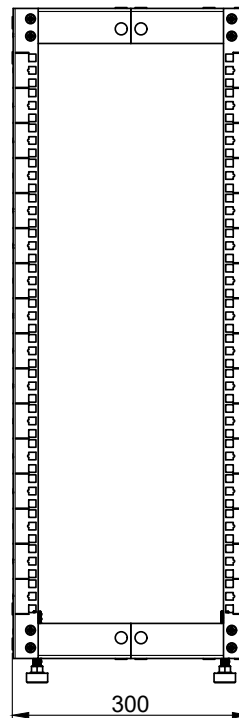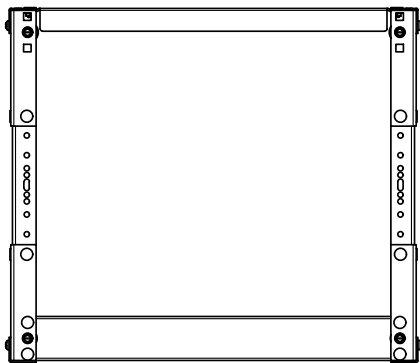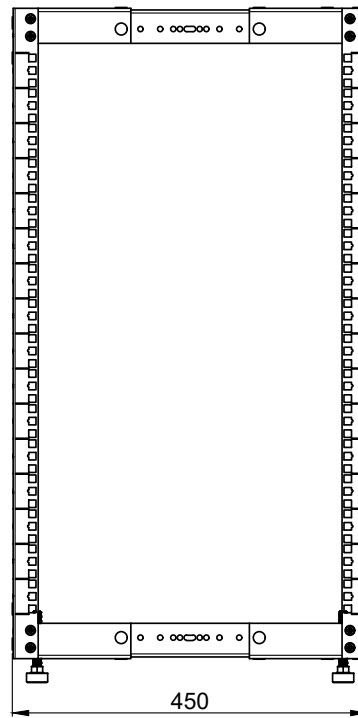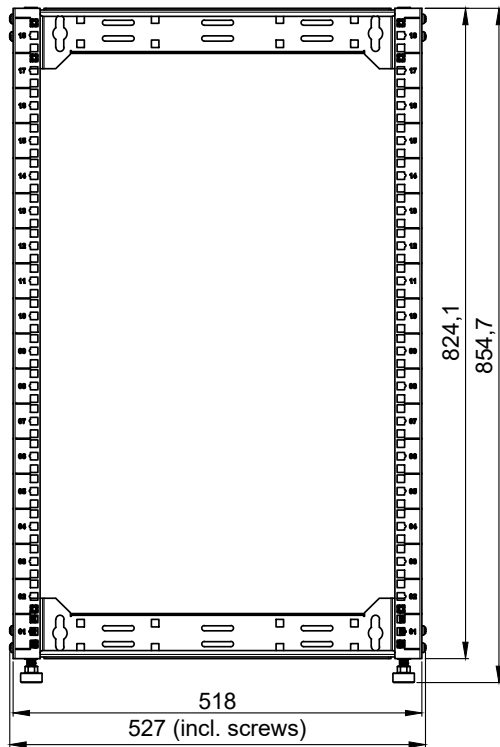

	<b>OPR318A</b>	<b>Product description:</b> 19" OPEN FRAME RACK - 18 UNIT - 300-450MM	
	<b>Weight:</b>  TBA	<b>Outer dimensions:</b> (w x h x d) 527 x 854,7 x 450	<b>Unit height:</b>  18 HE