


Highlights:

- Triple shielding

Product information:


The HDM24 is a bulk reel of quality 24AWG-size HDMI cable. Since this thicker cable offers less resistance, it is highly suitable for relatively longer distances. It is designed for installation using the PROCAB contractor series equipment. Lengths below 10m will perform as HIGH SPEED HDMI with ETHERNET. Lengths between 10 and 15m will perform at STANDARD SPEED HDMI with ETHERNET standards.
Recommended HD distance : 20 m (1080p)

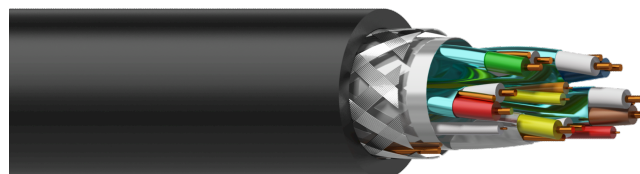

Certification:



Properties:



Inner Conductors:



STRANDED TINNED
COPPER



STRANDED OXYGEN FREE
COPPER

Shielding:



ALUMINUM
FOIL



BARE COPPER
DRAIN WIRE

Usage:

MOBILE

INSTALL

Physical Characteristics:

Inner conductor	Insulation	Material	FM-PE 1.4 mm (Ø) (5 pair)
			HD-PE 0.9 mm (Ø) (1 pair)
			HD-PE 0.9 mm (Ø) (2 cond.)
	Shielding	Aluminium foil	Al-mylar, 100% coverage - 25% Overlap
		Drain wire	BC 1 x 0.511 mm (Ø) (OFC)
Overall shielding	Aluminium foil		Al-mylar, 100% coverage - 25% Overlap
	Drain wire		BC 1 x 0.511 mm (Ø) (OFC)
	Braiding		AL-MG 16 x 12 x 0.12 mm (Ø)
Outer jacket	Material		PVC 9.5 mm (Ø)
	Colours		Black
Inner conductor	Material	BC 1 x 0.511 mm (Ø) (OFC) (5 pair)	
		TC 7 x 0.16 mm (Ø) (OFC) (1 pair)	
Type of cable			HDMI High Speed with Ethernet
Inner conductor	American Wire Gauge	24 AWG (5 pair)	
		26 AWG (1 pair)	
		26 AWG (2 cond.)	

Mechanical Characteristics:

Temperature range	Fixed installation	- 40 °C till + 80 °C
	Flexible installation	- 15 °C till + 60 °C
Bending radius	Fixed installation	6 x outer diameter
	Flexible installation	8 x outer diameter

Variants:

- HDM24/1 - 100 m wooden reel
- HDM24/3 - 300 m wooden reel